

DE HAVILLAND GIPSY MOTH

By BILL NORTHROP . . . A little ahead of the recent trend toward quarter-scale R/C models, the editor's Moth was campaigning in AMA Nationals competition about 12 years ago. We have presentable plans at last! Anyway, we felt ready to build an

. The August, 1958 issue of Aeromodeller solved a problem for us. By that time, we had been into radio control for about three years. First there was a Berkeley-kitted version of Walt Good's Rudder Bug, followed by about five original designs, including the first three of a long string of biplanes. One of the bipes was a 40 inch span Great Lakes Trainer, which became our first published construction article.

All of the above were single-channel escapement, pulse rudder, or Galloping Ghost (pulse rudder and elevator) radio controlled models. This may seem unusual to those of you who have come into the hobby in the past 10 or 15 years, but in those days, single-channel dominated R/C about 10 to 1 over multichannel, and digital proportional was unheard of.

Ace R/C five-channel reed/relay radio kit, and operate it with a Bramco (who!?) five-channel transmitter that a friend was ready to sell (By the way, "channels" in a reed radio did one thing each . . . like right rudder was one channel and left rudder was another channel. So with five channels you could have elevator and rudder, plus a sequencing escapement that was kicked by the fifth channel to select two or three throttle positions!).

That 1958 Aeromodeller issue featured an article and excellent scale drawings of the Gipsy Moth, a biplane designed and first built by De Havilland back in 1925. In fact, it was the first airplane built by Captain G. De Havilland, in collaboration with Major F. B. Halford, of the Aircraft Disposal Com-

pany (1). It was also, therefore, the first Moth, a famous name in aviation and De Havilland history, Actually, the first Moth was powered by the 60 h.p., 4-cylinder Cirrus engine, and was designated "D.H. 60 Moth." The later, 120 h.n. Ginsy engined Moth became the "Gipsy Moth". There was also a 5-cylinder radial "Genet Moth." The Gipsy Moth was the immediate

forerunner of an even more well-known De Havilland aircraft, the Tiger Moth, Basically a Gipsy Moth with the top wing moved forward, and then both wings swept back about 10 degrees to regain proper balance, the Tiger Moth was the backbone of military pilot training for England's World War II pilots. To this writer's mind, these two biplanes are the epitome of light horsepowered, personal aircraft, throughout the history of

Two things influenced our decision to draw up construction plans for a 3 inch scale model of the Moth . . . an engine, and a pair of wheels! About this time, Forster Brothers was making the .99 with a two-speed, ignition system. And about the same time, we came across a pair of 6 inch M&S Airwheels. made in England, What better excuse could a modeler want than to build an airplane to suite these items!?

The original drawings (which still exist) were made on the backs of blueprints brought from our engineering job. Several had to be taped together to accommodate the huge size of the fuselage. A flush-panel door was used for building the fuselage sides. At the



time, our workshop was a small laundry area off the family room. The door was temporarily set up on the dining room table while the sides were built. Later, when working on the fusedage in the shop, it was necessary to carry it into the family room in order to turn it around when we wanted to work on the "other" side!


As work progressed slowly, while other models were being built and flown, it wasn't until sometime in 1959 that we were ready to purchase the engine. Forster had been advertising a trade-in deal . . , any old engine and 26 bucks for a new .99. But wouldn't you know it? When we finally wrote in to get ours, we were told that there were no more 99's available! After a fruitless search, for a new or used one, we again wrote to Forster Bros, and explained that we had this plane well on its way, designed around the .99, and now, no engine. Could something be done?

We received an answering letter that is still in our possession. In it, one of the brothers said that our letter was so plaintive that they couldn't turn it down, and they were assembling one last engine from available parts, to accommodate our drasts situational Perhaps we can claim, with written proof, to own the last Forster factory own the last Forster factory.


produced .99! In 1961, the Nationals were scheduled for Philadelphia, only 50 miles or so



off the ground. Every owner of the early Quadruplex system developed a strong left arm!
PHOTO BY BILL COONS



Reproduction of Gipsy Moth scale views from August 1958 Aeromodeller. These plans, in 1/48th and 1/36th scale, are still available from Aeromodeller. Wrins to Model & Allied Publications Ltd., PO Box 25, Bridge St., Henel Hempstead, Herst, England NP1 1EE.





Another just-completed photo. Foreter .99 was unable to get the plane off of a close-out grass

from our home town of Wilmington, Delaware. We decided that, although we had always built and flown for our own amazement, that we should take a whack at the "Biggie" for our first competition.


Sound familiar? The plane was to exact scale outline, rib soucing, exterior construction appearance, etc., but we had painted and decorated it the way WE wanted it . . . not to any one particular full size

aircraft. Consequently, our presentation stated that we finished it as we would do if we were restoring a real Moth. How's that for trying to pull a fast one?

To make a long story a little shorter, the Moth didn't fly in 1961 . . . probably very lucky for both plane and

pilot. Only one test attempt had been MODEL BUILDER

field . . . was later replaced by Fox .59 that powered very first "Big John".



made prior to the Nats, and that was a stall on takeoff that caused only minor damage. Rebalanced and trimmed, it made one beautiful and realistic takeoff run at the Nats, only to have the ignition shot off a foot above the ground

(Ignition coil was later found to have opened up). By 1965, when the returned to Philadelphia (that old rotation system was really great, and the ideal way to give every modeler a short at the "Big One" at least once every foot or years), we had a tot more thying experience under our bill, and had considered under our bill, and had proposed to the proposed under the proposed under


off the ground, had been replaced by one of those amazing old plain-bearing Fox 59's. This engine teaked more fuel out through the front of the case than it burned above the piston (Duke said, "You don!" want that bearing to run dry, do you?"), but it pulled the Moth ground on a 12 x 6 (boiled) Grish whom

at lost about scale speed and realistically as the devil!

At the Nats, with a couple of solen bodysoid labels to relax the narves, and old flying buddy. Graham Lomax, to handle and start the joley for, we taxied out, poused on the coul, and am provid to say, put on a scale flight that brough to say, put on a scale flight that brough the scales of their thing. The whole flight consisted their thing.

of takeoff, straight flight out, procedure turn, straight flight back, figure eight, el touch-and-op, traffic pattern, and it landing. The thing is, that it was all d, done at not over 25 feet of allitude! in The Navy pilots, who were supposed to the judging, were instead, snapping in pictures a mile-seminute, and must have all filled in the score sheets later. On the

touch-and-go, the old Fox, loaded up from Idling during the approach, luckill did caught on when the throttle was opened, and as it beliefed out a hoge did cloud of blue smoke, the Moth hauled out after gently rocking gracefully from the first airspeed. The long there after that to touch-and-go and was undoubtedly the deak award of our modeling career. We does a ward of our modeling career.

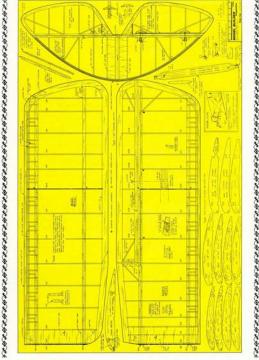



anitial control system was kin durit reed receiver with stratch durit servos based on highly Midget electric motors with clutch drives! Sprung hatches in outside skin gave access to switches.

placed third in Scale, and turned out to be the first recipient of the annual Sterling Models' Scale Achievement Award trophy.

The Moth picked up a 4th place trophy at the 1966 Chicago Nationals, and was then more or less retired. Everything but the fuselage is still intact to this day. The fuselage lost an argument with a shifting television set, when we U-Haul trailered it to Southern California in 1970.

CONSTRUCTION

The first step in construction is deciding what kind of a model you will build. For Sport Scale, you have everything you need on the drawings as shown, If you're going for Precision (AMA) Scale, the drawings are still good for scale outline, rib and spar spacing, etc., though the wing airfoil thickness was increased slightly to improve structural strength, Before getting too far into the finishing, however, you will probably want to do the usual researching for documentation, which will turn un details that can be added as construction progresses. As mentioned previously, the August 1958 Aeromodeller provides a great deal of information, if you can still find one. That is all we used for our presentation in 1961, 1965, and 1966, but things weren't as picky-picky in scale 10 to 12 years ago.

We'd venture to say that detailed building instructions for an airplane of this type are quite unnecessary. When we started building it back in 1938-59, we were looked upon as the typical nut who trys to build a B-17 with working windshield wipers for his first attempt at modeling and/or R/C. But het's just run through the basic parts and see what's instore. It's not really difficult... just big, and material consuming! Our way of building airplanes has

almost always been to construct the tail surfaces first. They are usually easy to put together, therefore getting them done makes you feel like you're making good progress. They also set the tone of the construction for the whole project, establishing size, amount of detail, and a feel for the quality you intend to impart to the entire aircraft.

Just to prove that laminating is nothing new, maybe just in size, we used this method for the leading edges. Perhaps you might want to follow through with the trailing edges too, but



with 3/32 balsa. Nylon covering over all.

as far as strength is concerned, fear not. The original model was covered with rivion, and that stuff really oulls!

The hinging system could certainly be simplified with today's ready-made products, but if your masochist tendencies dominate, the system shown certainly simplifies covering and finishing, with assembly coming fast. Sections explain the set-up.

As the wings are supported by functional strust and rigging wires, there is no need to build them as though they were to be cartillered. The joiners primarily locate the wings, and carry no bending loads. They will support the panels during rigging, but once the flying and landing wires become "strumming tight." The joiners carry sheer loads only, while the struts and wires do all of the work.



Tail surfaces are exact scale. Hinging system allows assembly after covering and finishing is completed. Deck is straight curve... can be covered with two sheets of wood.



Some cockpit goodies. Instrument penel was engine-turned using drill press and guide, with hard eraser for burnisher. Instruments behind a layer of plastic. Others include fire extinguisher, throttle, and elevator trim quadrant.

We made an aluminum rib template and punched 2 or 3 holes by driving a nail point into the template while resting it on soft wood. The resulting flash holds the pattern firmly in place while you cut out a rib. An hour or two in front of the T.V., with a cutting board in your lap, should get you a complete set of ribs. All four panels are basically the same,

except for obvious differences, such as left and right (!), and upper and lower (!!), Again, the ailerons are hinged in a fashion similar to the tail, and provide a nice closed-slot appearance . . .

plus looking scale! An interesting note on aileron differential: In keeping with our discussion in George Wilson's basic aerodynamics article in the March 1977 issue, De Havilland really went for differential Cable from the control stick went out through the wing to a disc which was located flush with the bottom surface of the lower wings. The cable wrapped around the disc, in a groove, and ran back to the stick. Movement of the stick obviously rotated the disc. The aileron pushred was mounted on the disc in such a location that full side movement of the stick would raise one alleron about 4 inches (at the trailing edge) and lower the other one by only a guarter of an inch! So much for downaileron drag pulling the wing in the wrong direction!

To maintain realism, we would suggest using the aileron disc/bellcrank, but run a wire pushrod from the servo instead of a continuous cable! And speaking of servos, there's almost no way in the world to avoid using a servo in each lower wing panel for alleron control, Install the servo where indicated, with a removable sheet aluminum hatch cover on the bottom surface for access to the servo. Run the lead through a 3/8 inch diameter hole in the root rib. with a corresponding and matching hole in the fuselage side. The suggested ply hatch in the fuselage bottom provides access for connecting the leads to a "Y" connector from the alleron output of the receiver.

Incidentally, we flew our Moth with coupled allerons and rudder, with rudder really doing most of the work. The ample dihedral makes ailerons almost unnecessary.

Now comes the fun . . . unless you couldn't resist temptation, and have already begun fuselage construction! After building the wings, you've probably already found a source of long wood, though there's nothing wrong with careful splicing. The main longerons of 1/4 square spruce are later covered with 3/32 sheet balsa, so any splice joints will be well reinforced. The ply doublers forward of the balance point need not be lightened by cutting away material, as the model will probably



and scale-like closed gap, also more efficient.

need nose ballast due to the lone tail moment. We carried our own wet-cell nickel-cadmium starting battery just behind the firewall. It weighed about 11 or 12 ounces, and balanced the model perfectly. It was permanently wired to the glow plug through a hidden slide switch. It was usually left on during the whole flight.

After framing up, and before covering with sheet balsa, the various attachment and control rigging devices are installed in the fuselage. Even if you don't go for Precision (AMA) Scale, using the scale rudder bar and outside cables is the most convenient method of controlling the rudder, Back then, we used stranded control line leadout cable for the rigging and controls. The size required for adequate strength was way below scale diameter, so we simply selected the wire for scale appearance. Nowadays, the best material is nylon coated stranded steel wire, which can be purchased from Lou Proctor (Proctor Enterprises), or possibly your local deep



cables are on outside. Pushrod from servo operates bar.



lidler bur for elevator. Pushrod from servo rotates ber, and four cabi

(only one shown) go through fuselage skin to elevator horrs. MODEL BUILDER

sea fishing equipment supply house, You'll be buying Lou's turnbuckles and other rigging fittings, so you might as well get everything from the same

source. The elevator pushrod is located low in the fuselage and leads to an idler bar across the fuselage aft of the rear cockpit. The idler bar carries metal horns to which the inside/outside elevator cables are attached. Having the pushrod mounted low permits unobstructed detailing of the cockeit if you care to go that way. We had fun making bit sheet aluminum quadrants for the throttle and spring-loaded elevator trim. Lord knows if there ever was an engine-turned instrument panel in a Gipsy Moth, but ours had one!

We have redesigned the nose somewhat from our original model. The Forster 99 engine's crankshaft centerline is about a 1/2 inch below the mounting lugs, so the bearers were refocated to accommodate the normal crankshaft/mounting lug relationship of today's engines.

Speaking of engines, don't get the idea that because the Moth weighs 15 pounds and carries over 2400 sq. in. of wing area, that a large engine is needed. That old Fox .59 did a fine job, yet it would be eaten alive by even a moderate, present-day .60! The best choice is an engine that will comfortably turn a 14 or 16 inch prop. The Fox couldn't, and it wasn't until we dropped to a 12 x 6, that the engine could "get it on" However, a 12 inch prop looked like a toothoick on the nose of the Moth.

The rather large removable cowl was layed up from various balsa blocks, and then carved to shape. The inside was only hollowed out for clearances and to allow for good air circulation. A magnetic cabinet latch and a couple of locator dowel pins took care of holding it in place.

Rigging the ship for a flying session takes about 15 to 20 minutes, once you get used to the system. After plugging in the wings, slip the struts into place and install the locking crosswires. We used turnbuckles at the inhound end of the landing and flying wires. Once adjusted for proper align-

JUNE 1977



419

Reproduction of "Sketchgage" from August 1958 Aeromodeller gives many helpful details for the modeler who wants to add realism to his model.

ment, safety-wire the flying wire turnhook on the slackened landing wires, buckles, and don't ever loosen them.

Install the flying wires first (the wings will say slightly now, and the flying wires will slip into place easily), Now

and begin tightening the turnbuckles until you get a little higher strumming note on them than you do from the flying wires. When adjusted, "safetywire" the four turnbuckles with short lengths of Dacron string as used for 1/2A control line flying, Just cut 'em off when you're dismantling to go home. It's a good idea to install 2-56 bolts

in threaded hardwood blocks that will pass through the wing joiner tubes and lock the wings on. Engine vibration and bouncing around on the ground might encourage the wings to slip out on their joiner tubes. As the rigging wires terminate on the root ribs, they do not prevent the wings from pulling away. Unless you've already participated

in the growing interest for ultra-large



he the ones you thought, but the other ones, who have just introduced a line of precision machined engine accessories for model boaters. These include venturis, exhaust throttles, and heads, the latter two water cooled. The throttles are designed to give you smooth, onick response and complete engine cut-off, and are machined from aircraft quality aluminum, Prices range from \$38 to \$55.

The 'Other Pottols' also have an extremely clever adapter for using Dremel collets in the Astro Flight Mini-Starter. This gives you a not previously available capability to drill sand and saw at the field or lake. The Astro Starter works from any 12 volt battery, and is also available from this source for \$24.95. The collet adapter is priced at

The "Other Pottols" will accept requests for information, prices . . . and even orders . . . at the Other Pottols Throttle Shop, P.O. Box 992, Saratoga, Co. 95070

A full line of R/C helicopters is now available from one of the youngest, but by no means the smallest U.S. helicopter manufacturer. Spearheaded by the young man who at one time could claim to be the nation's youngest R/C helicopter flyer, John Simone Ir., American R/C Helicopters, Inc. has it all together for rotary wing fans

The basic offering is the 40 size Rev-olution, a helicopter for the beginner, yet capable of advanced maneuvers in the hands of an experienced flyer. It is, priced at \$199 without engine; \$239 with K&B .40 and "Superr-Quiet" muffler: and \$239 with OS 40 FSR

and muffler. Once over the basic learning steps, a Hughes 500 fiberglas fuselage is available, and can be added easily and relatively inexpensively, at \$84,95, including all hardware

If large size ships are your choice, the Rev-olution II is for you. This .60 size ship, with all the features of the small machine, is available as a basic kit for \$269; with K&B .61 and "Superr-

Quiet" muffler for \$339. The "Superr-Quiet" muffler is available also separately, at \$14.95 for the .40 size, and \$18.95 for the .60. Floats too, can be had for \$19.95. including mounting hardware.

Available at your dealer's or direct from American R/C Helicopters, Inc., 23811 Via Fabricante, Suite 102, Mission Viejo, Ca. 92675.

Superior Flying Models, of Auburn, Washington, has thrown its hat in the kit building ring. Presently in production and available, it has three gliders and one Half-A sport scale, all for R/C.

SFM's 'Bunny', designated as a beginner's kit, spans 73 inches, and weighs in at 24 oz., for a 6 oz./ft, wing loading. The kit is complete with

It tilts, turns, and rotates - - -

firmly holding your work exactly where you want it - - - all controlled by the exclusive patented variable load control knob and split ball feature.

PANAVSE

Retter than a

third hand!

THERE IS A PANAVISE TO FIT YOUR EXACT NEEDS Select the most suitable combination from the five interchangeable heads and four bases. Add more heads later as you need them.



THERE IS NOTHING

FISE LIKE IT!

FOR YEARS AND FUNCTION AS YOU WANT AND EXPECT IT TO.

We are proud of our product.

with all modesty we present the

greatest hobby vise ever created!

PORNO ACE

Dept. 63 10107 Ameta Ave., South Gate. CA 90290

muchined wood parts, all hardware, spruce sours, dowel reinforced leading odge, and detailed plan sheets and a booklet entitled; "Soaring, the Gentle

Art". Price is \$38, postpaid. Next in line is the T2, 75 inches and 28 ounces of fun for the more experienced glider flyer. It incorporates coupled ailerons and rudder, and flaps coupled to the stab. Included for the \$44 price are all machine shaped parts. and a complete hardware package.

The big one is the Boss-T. 120 inches and 35 ounces for two or three channels. It also uses coupled ailerons and rudder, flying stab, and trailing edge flaps. Selected materials, complete hardware, and machined parts are

including the flaperon mixer.

featured with this one also. For the power fan, SFM has it's Piper Cherokee Lance, quick to build and easy to fly with a mild .049. It features a rugged all-wood structure, including pre-shaped balsa parts, spinner, tank, and Tatone engine mount. Even a paint scheme is suggested on the enclosed

super-sharp plans. The span is 37 inches, area 225 squares, and a flying weight of 20 ounces. Price: \$25.

Please be sure to mention MB when you write to Superior Flying Models, 4027 So. 275th Pl. Auburn, Wa. 98002.

Gipsy Moth . . Continued from page 19

R/C scale models, flying the Moth will be an experience you'll always remember with distinct pleasure. Flight is smooth and unhurried, so realistic in scale speed that you almost feel as though you're not really flying it at all . . . that the plane just happens to be going in the same direction that you're trying to urge it with the transmitter. Once you apply throttle and begin taxiing out to takeoff position, you are no longer dealing with a model . . . there is a quarter-size aircraft at the other end of the radio system you hold in your hands.

Pylon Continued from page 23

and follow the instruction sheet included in each box of props. As we mentioned last month, they are coming out with a Q-M version of their "Little Toni". The finished version and the proto kits they had on display looked very good, and were of the same high quality we've

come to expect from the Prather people. 1Z Products, 23018 S. Normandie. Torrance, Ca. 90502. Zinger Props . . . as far as we could tell, their props weren't specifically produced for Q-M racing, but their size range and shape leads us to believe they will be competitive